Cement GruppoNueva

www.grupponueva.com

Expressions of urban Surfaces

when love and skill work together,







Cement collection is a great way to add raw, and minimalistic looks to your space. The cement improves the surface abrasion resistance while creating the best looking areas. The smooth flow of cement gives the subtle ambience to the environment.






Unique nature inspired collection with endless combinations. Subtle and strong colors with delicate veins that offers great aesthetics, lasting for decades.

Cement




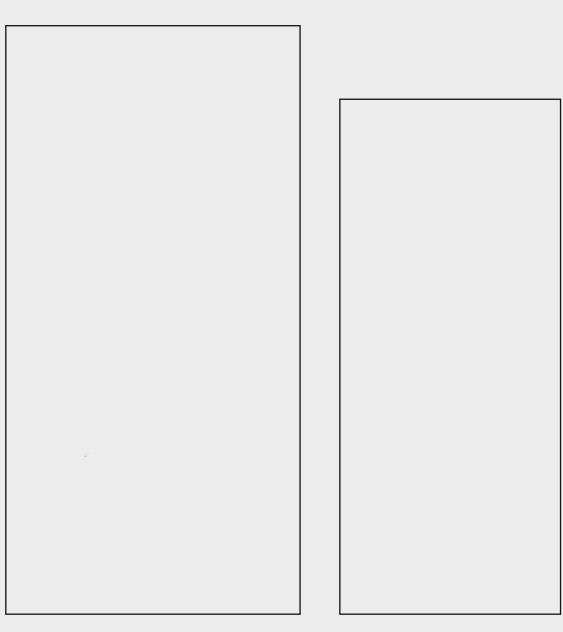

1600X3200X12 & 20

1200X2800X9 & 6

Explore the array of versatile sizes of tiles that we manufacture for every need and space. Different tile size impacts the overall appearance, so choose your size as per the look that you desire.

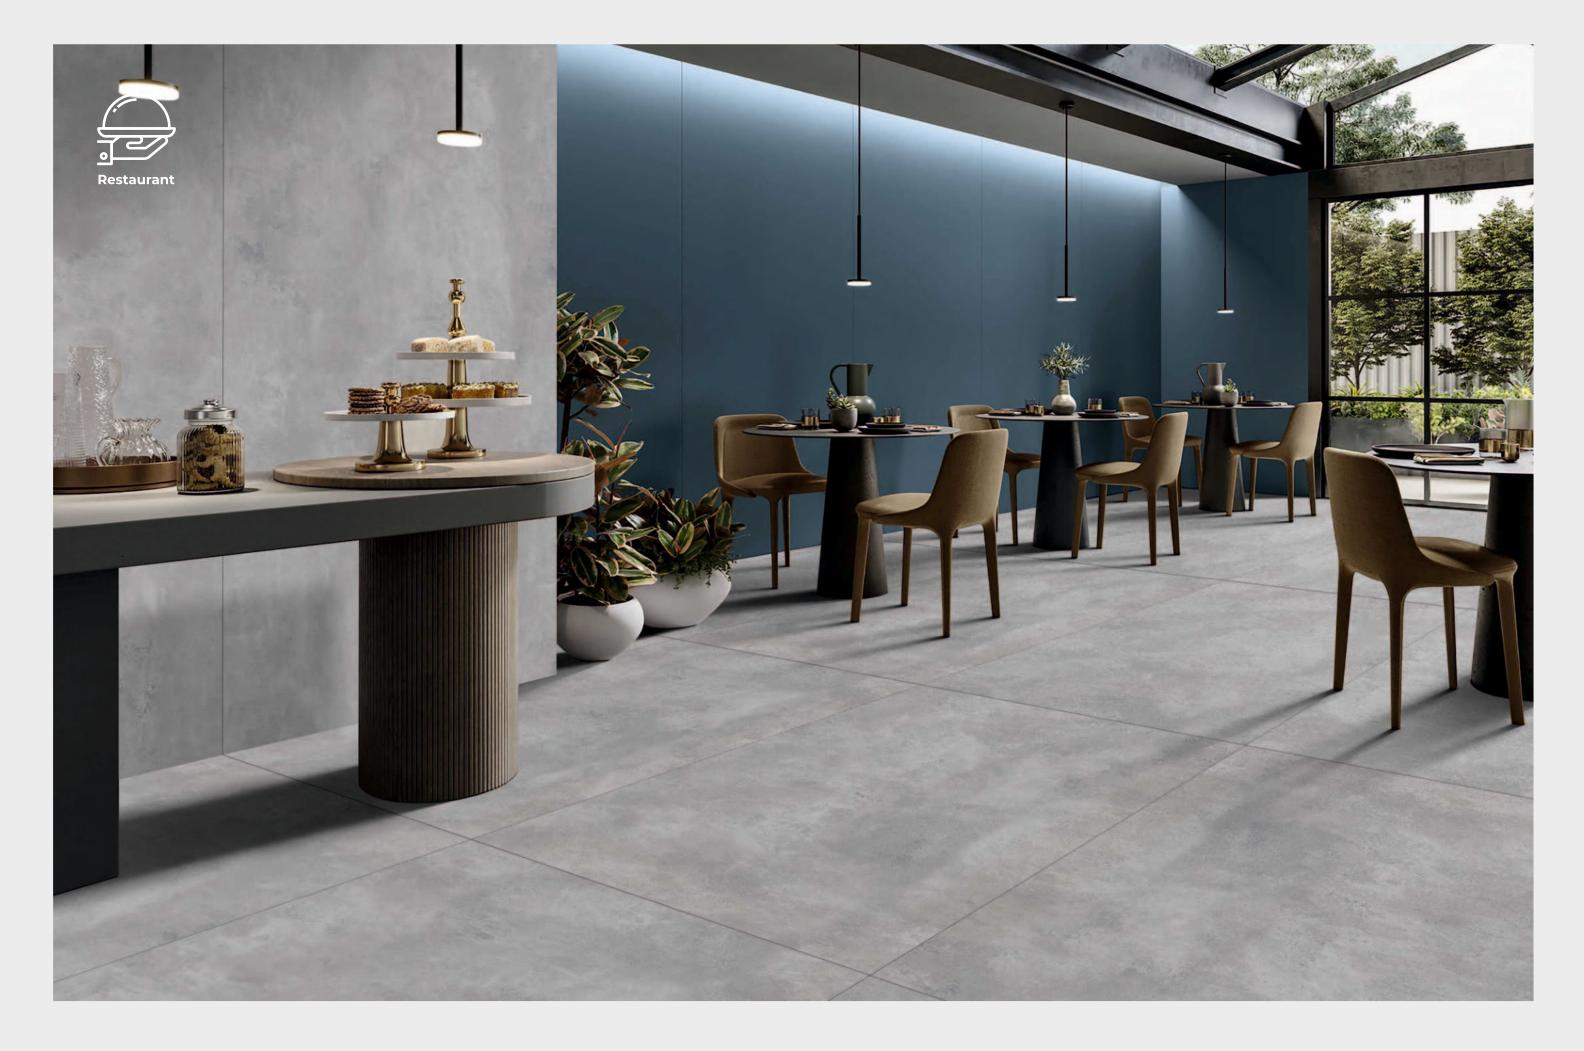



EURO ELEGANTE ASH

Euro has a subtle background with very unique style brush effects. Euro Elagante Ash is a fresh dark grey color tone to decor your spaces.

Suitable Applications













FINISH: NATURAL

AVAILABLE SIZES:





EURO ELEGANTE BIANCO

Euro has a subtle background with very unique style brush effects. Euro Elagante Bianco is a fresh light grey color tone to decor your spaces.

Suitable Applications














FINISH: NATURAL

AVAILABLE SIZES:

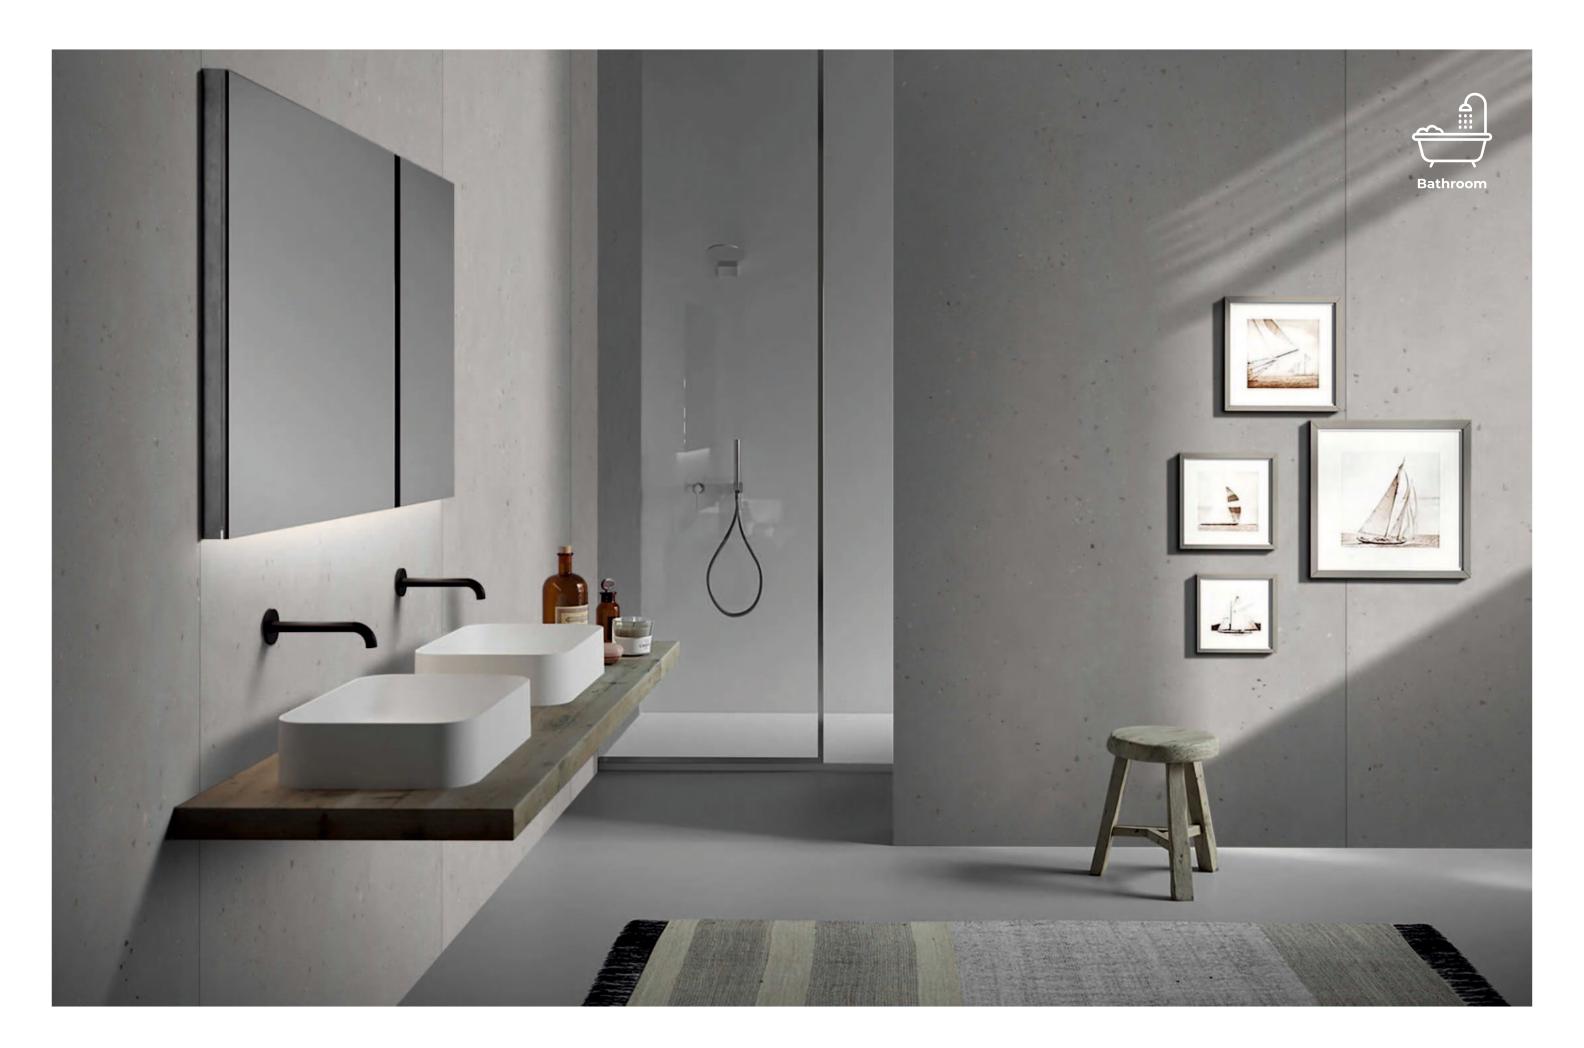



LONDON GREY

An English taste of architecture for the modern living spaces. Unique color combinations of chips with the warm grey background is a real beauty of London Grey.

Suitable Applications













FINISH: NATURAL

AVAILABLE SIZES:





OSLO GREY

A nordic grey with the pink and blue color effects in the background and the white waterline passing through the whole slab is stunningly well done.

Suitable Applications














FINISH: NATURAL

AVAILABLE SIZES:

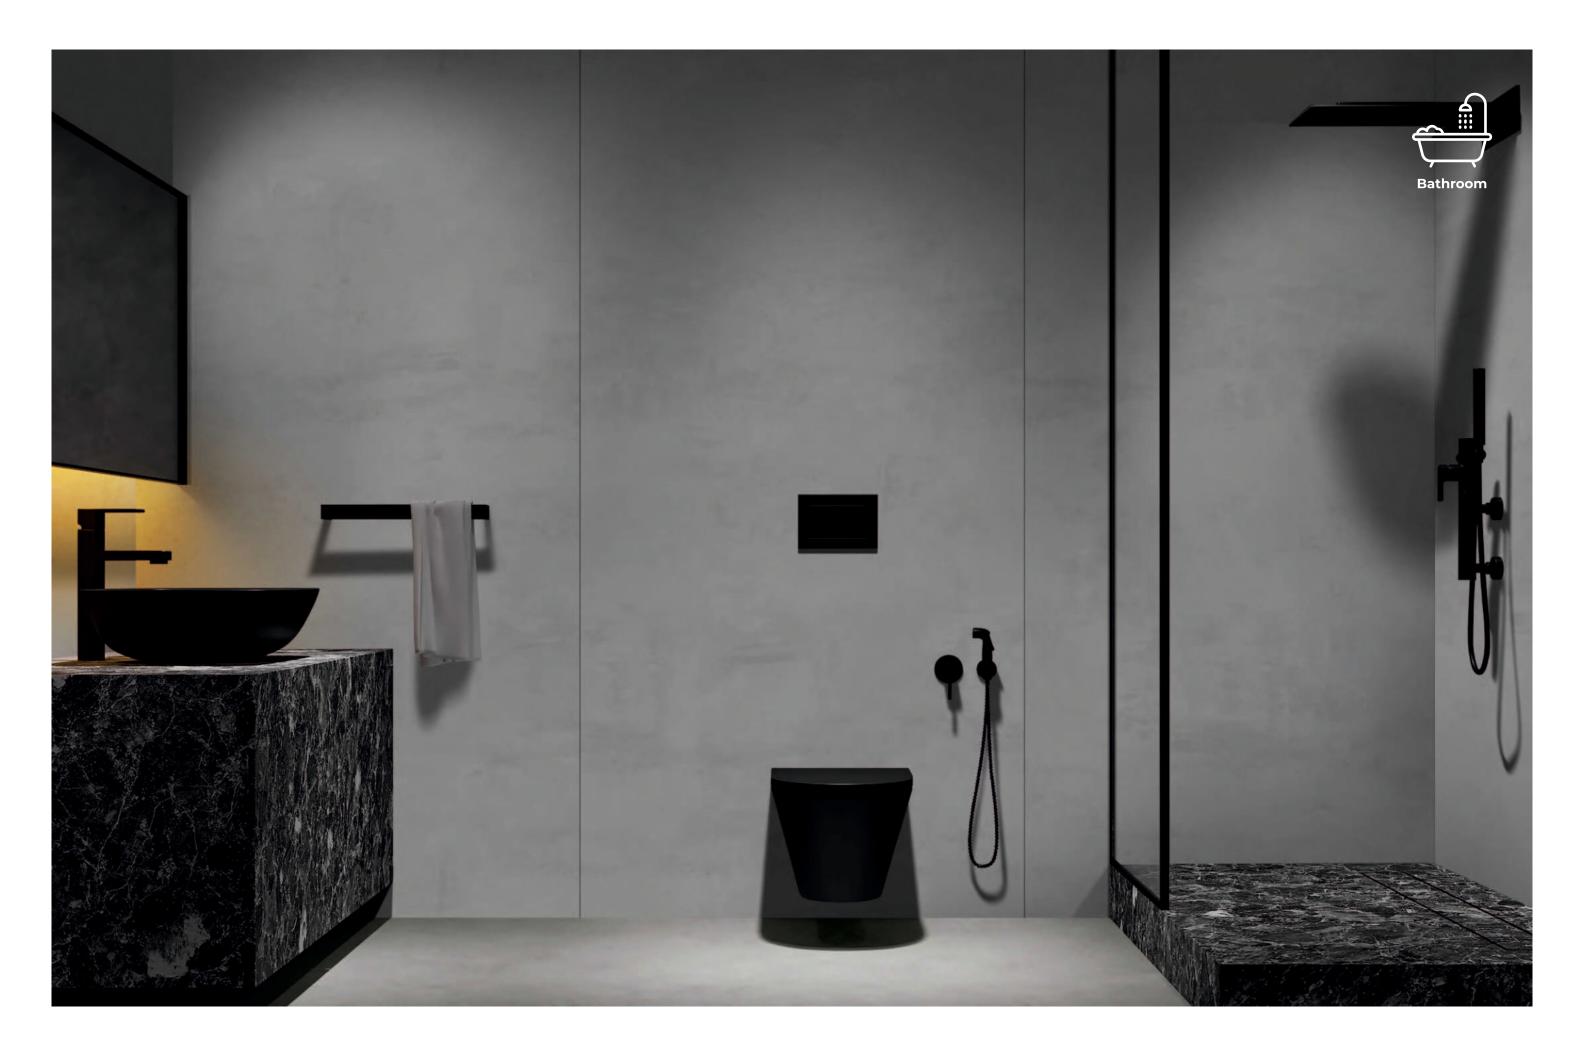



MOHER GREY

A classic grey which everybody loves, that is Moher.

Suitable Applications












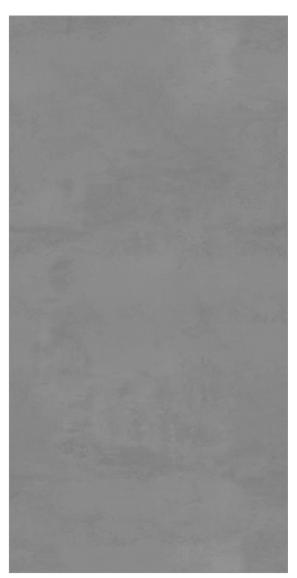

FINISH: NATURAL

AVAILABLE SIZES:





TOKYO CLOUD

Modern Grey background stone with the little dot effects of dark tone spred across randomly.

Suitable Applications













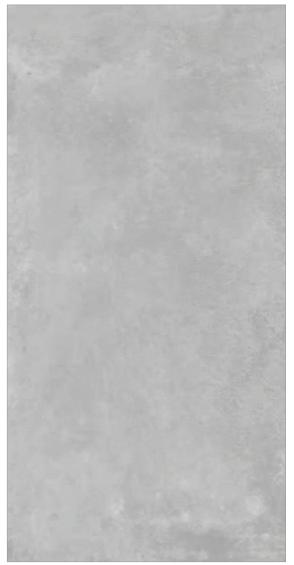

FINISH: NATURAL

AVAILABLE SIZES:



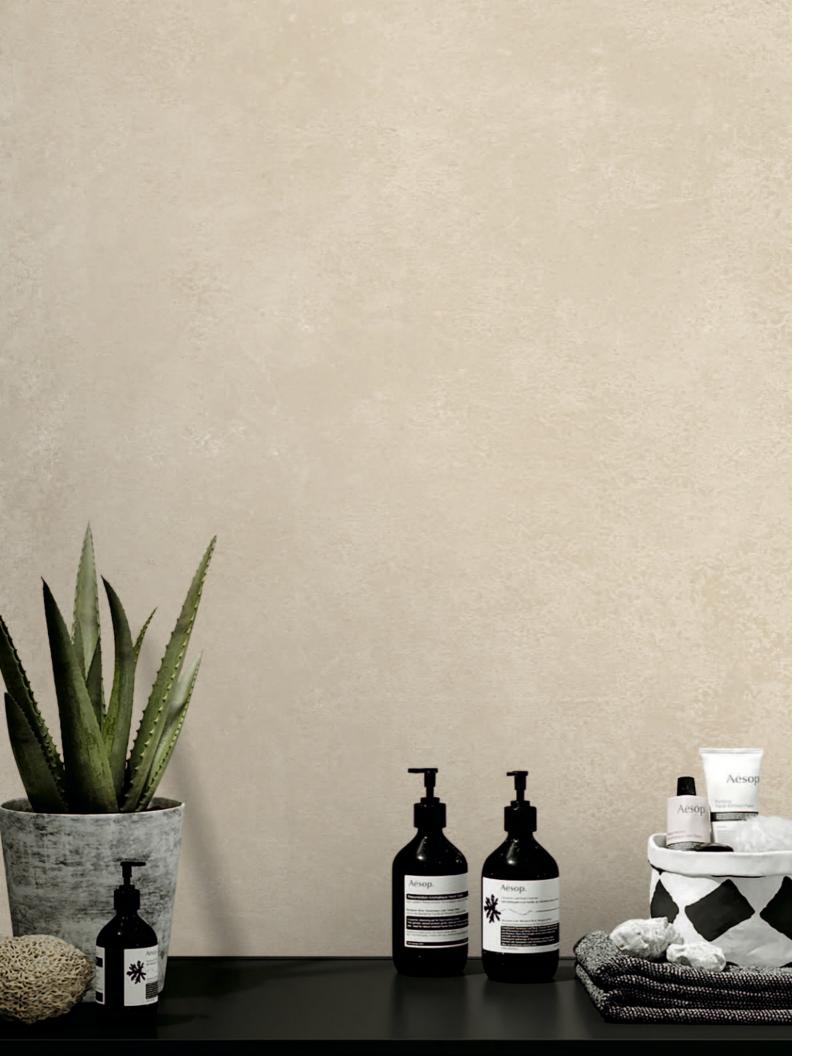

TOKYO SAND

Modern Beige background stone with the little dot effects of dark tone spred across randomly

Suitable Applications













FINISH: NATURAL

AVAILABLE SIZES:





REVIVE CONCRETE GREY

No fuss, no frills, just Pure Perfection! Revive Is the ideal choice for a minimalist look and feel.

Suitable **Applications**












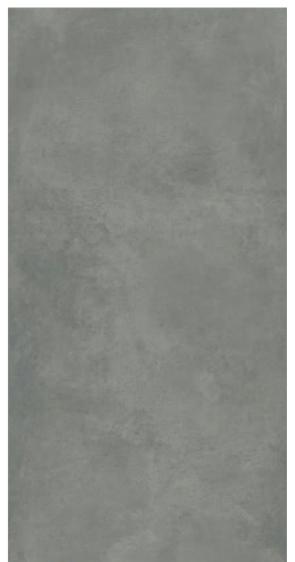

FINISH: NATURAL

AVAILABLE SIZES:





REVIVE ACTIVE WHITE

No fuss, no frills, just Pure Perfection! Revive Is the ideal choice for a minimalist look and feel.

Suitable Applications













FINISH: NATURAL

AVAILABLE SIZES:





REVIVE SUMMER SAND

No fuss, no frills, just Pure Perfection! Revive Is the ideal choice for a minimalist look and feel.

Suitable **Applications**












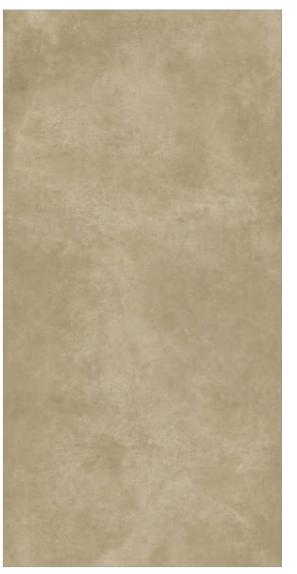

FINISH: NATURAL

AVAILABLE SIZES:





SURFACE COOL GREY

Textures from the nature with fragments of stone. Surface explores the timeless soul of stones.

Suitable Applications














FINISH:

NATURAL

AVAILABLE SIZES:



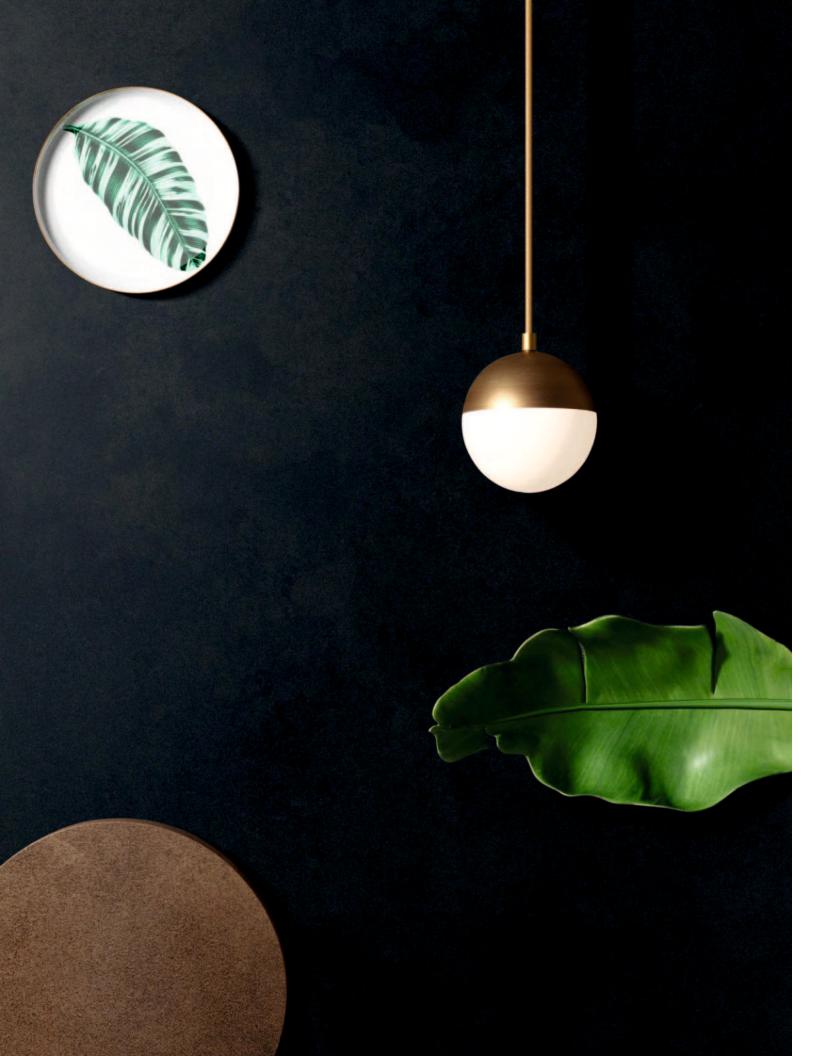

SURFACE NIGHT

Textures from the nature with fragments of stone. Surface explores the timeless soul of stones.

Suitable Applications












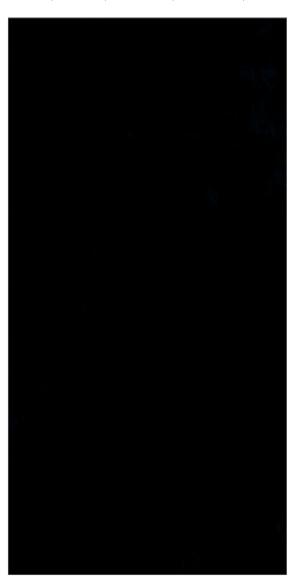

FINISH:

NATURAL

AVAILABLE SIZES:





SURFACE OFF WHITE

Textures from the nature with fragments of stone. Surface explores the timeless soul of stones.

Suitable **Applications**














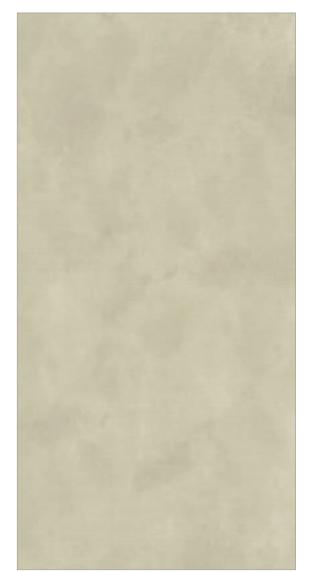

FINISH: NATURAL

AVAILABLE SIZES:





SURFACE SAND

Textures from the nature with fragments of stone. Surface explores the timeless soul of stones.

Suitable **Applications**













FINISH: NATURAL

AVAILABLE SIZES:

TECHNICAL SHEET

The Technical Details for each of the following slabs will remain the same as mentioned in the technical sheet:

1200 X 2800 X 9 X 6

1600 X 3200 X 12 | 20


SR.NO	PROPERTIES	STANDARDS AS PER ISO 13006 - 2018	OUR STANDARDS
01.	Deviation In Length & Width	± 0.30%	± 0.10%
02.	Deviation In Thickness	± 5.0%	± 5.0%
03.	Staightness In Side	± 0.30%	± 0.10%
04.	Rectangularity	± 0.30%	± 0.10%
05.	Surface Flatness Central Curvature	± 0.40%	± 0.10%
06.	Surface Flatness Edge Curvature	± 0.40%	± 0.10%
07.	Modulus Of Rupture (Kg/Cm²)	350+	450+
08.	Breaking Strength (N)	1300+	6000+
09.	Water Absorption	<0.5%	<0.07%
10.	Glossiness (Polish)	As Per Manufacturer	95+
11.	Glossiness (Matt)	As Per Manufacturer	8
12.	Crazing Resistance	4 Cycle	4 Cycle
13.	Stain Resistance	Min Class 3	Min Class 3

PACKAGING


A-frames & W ooden Vertical Pallet

To protect the integrity of the bigslabs during transport, optimized packaging has been specially designed and produced for the products.

The slabs are packed and shipped in specially made Wooden Vertical Pallet and on specific A-frames (specially designed to improve the carriage of these products in containers), taking care to protect every single slab from knocks and scratches as best as possible.

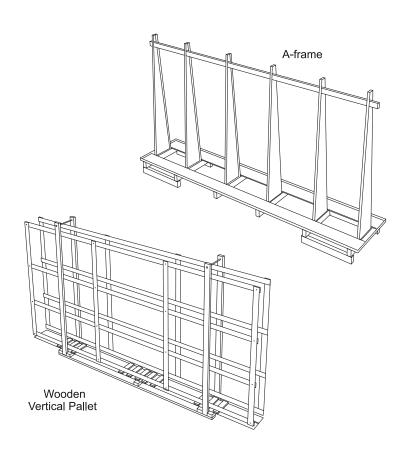


Handling the slabs on the construction site

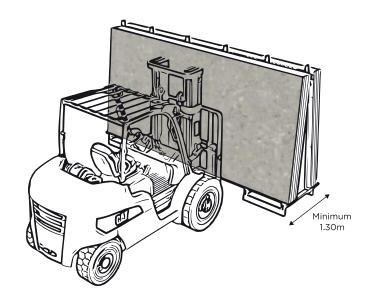


A-frame handling from long side (A) (Recommended Choice)

We recommend you to you use forks with a length of at least 1.30m, widening them to the maximum limit to make the most-possible use of the crate's surface.

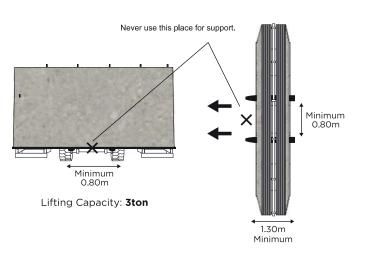


A-frame handling from short side (B)

We recommend you to use forks with a length of at least 2.80m, widening them to the maximum limit to make the most-possible use of the crate's surface.

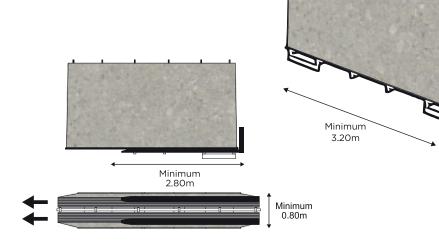

Lifting Capacity: **5ton**



Always pay attention to the movement and handling of the slabs to prevent splintering or breakage.


Make sure that oversized stone slabs or boards are delivered on a steel A-frame for support. Secure them with straps to prevent any horizontal movement during transport.

Panels can also be moved with a vertical clamp and overhead crane. To assist the movement of individual panels where the clamp doesn't close to 6mm, a rubber saddle can be made up (see photos) or vacuum suction lifters can be used.

When transporting to site, in particular benchtops with cut outs, always lay bench against a solid substrate such as MDF or similar. Ensure that backing support is at least 2cm wider than the benchtop, strap or tape, or both together, so handling will be easier and will avoid potential damage to panels in particular to cut outs. Always carry panels vertically not horizontally.



When handling the slabs, from removing them from the crates to fitting them on the wall or floor, we recommend you to use equipments designed specifically for handling large slabs.

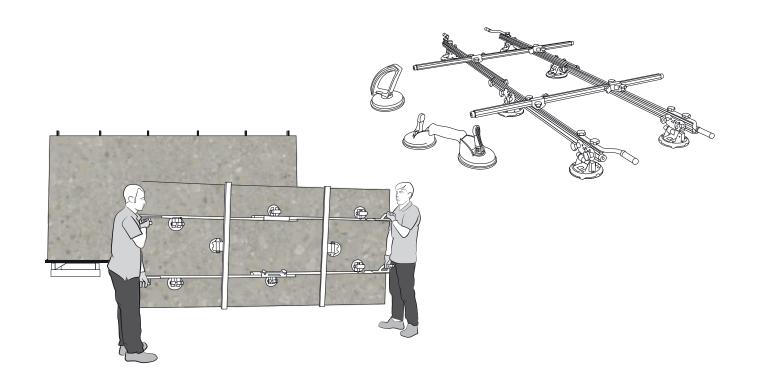

Handling with manual suction cups

In the case of two workers, perform the handling using manual suction cups (preferably equipped with a pressure adjustment function). The workers must remove the slabs by lifting them in the middle, then moving them in an upright position, positioning themselves at the two ends of the long side.

Manual handling

In addition to professional handling machinery, such as pneumatic handling machines or gantries, or the frame stated earlier, the slabs are usually moved (on the construction site and in the warehouse) by workers provided with tools that are commonly available and easy to use.

It is important to remember that manual handling must only be carried out where site conditions are amenable, such as:

- Ample room for manoeuvre;
- Ground-floor location;
- Easy access;
- Limited number of slabs to be laid.

IN ANY CASE, THE SLABS MUST ALWAYS BE HANDLED INDIVIDUALLY AND ENSURE THE WORKERS' COMPLETE SAFETY.



Note		

