OSZUL GruppoNueva

www.grupponueva.com



when love and skill work together,







Nature inspired look with our earthy elements. Filled with soft line, soothing colours, Subtle & brilliance textures, they stand out and liven up the surface. The tiles create pleasant aura and add up the uniqueness to your spaces.






Unique nature inspired collection with endless combinations. Subtle and strong colors with delicate veins that offers great aesthetics, lasting for decades.





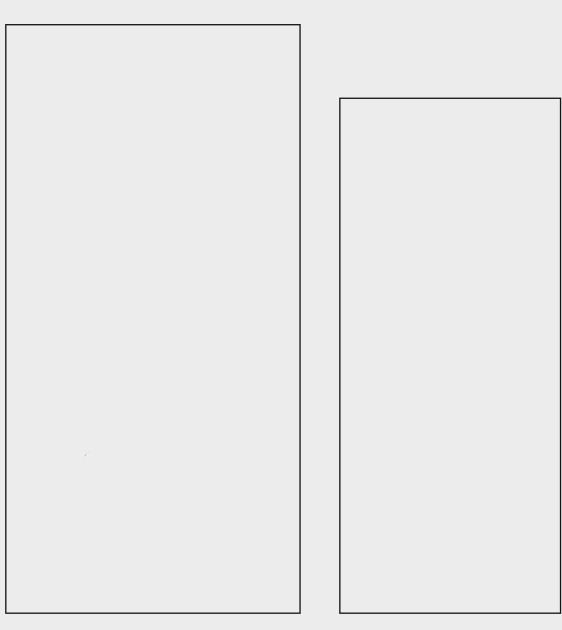


1600X3200X12 & 20

1200X2800X9 & 6

Explore the array of versatile sizes of tiles that we manufacture for every need and space. Different tile size impacts the overall appearance, so choose your size as per the look that you desire.



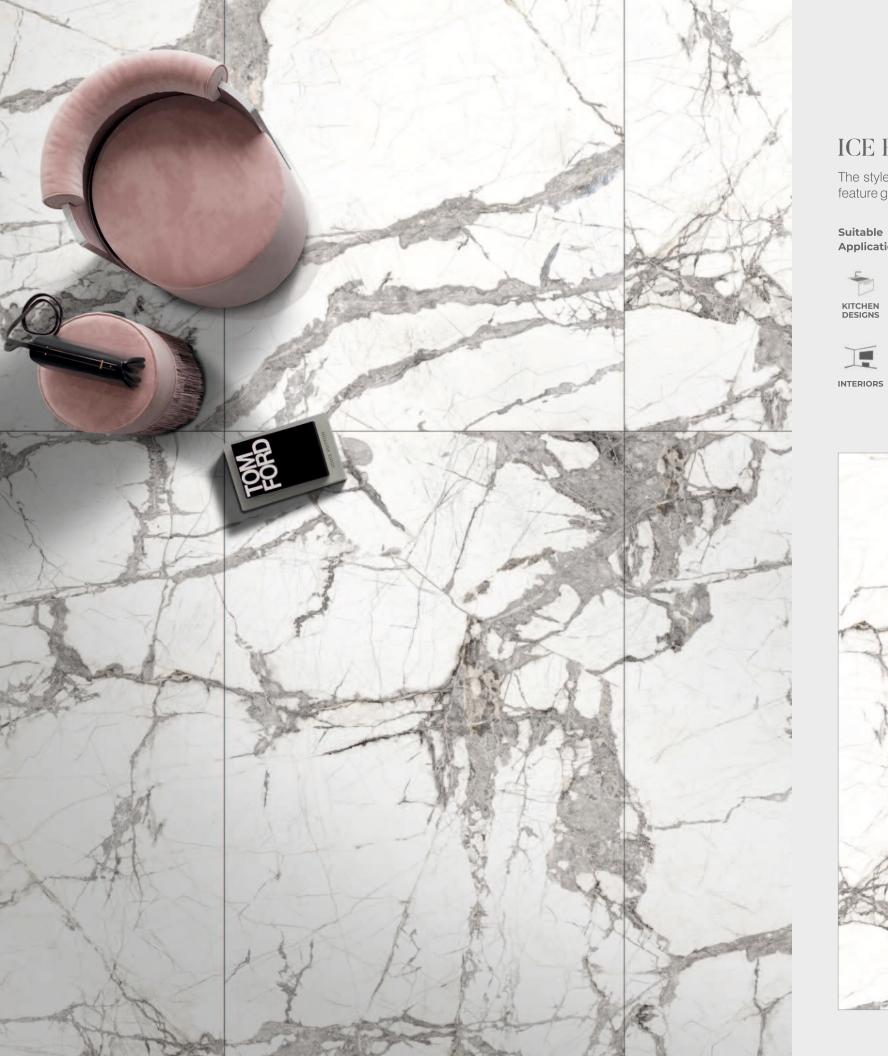

ICE BURG

The style that never goes out of fashion, and would perfectly enhance the interior space. The opulent feature gives high finish, gloss, and poise to your space.

Suitable **Applications**

















ACCESSORIES


FLOOR



FINISH: NATURAL

AVAILABLE SIZES:



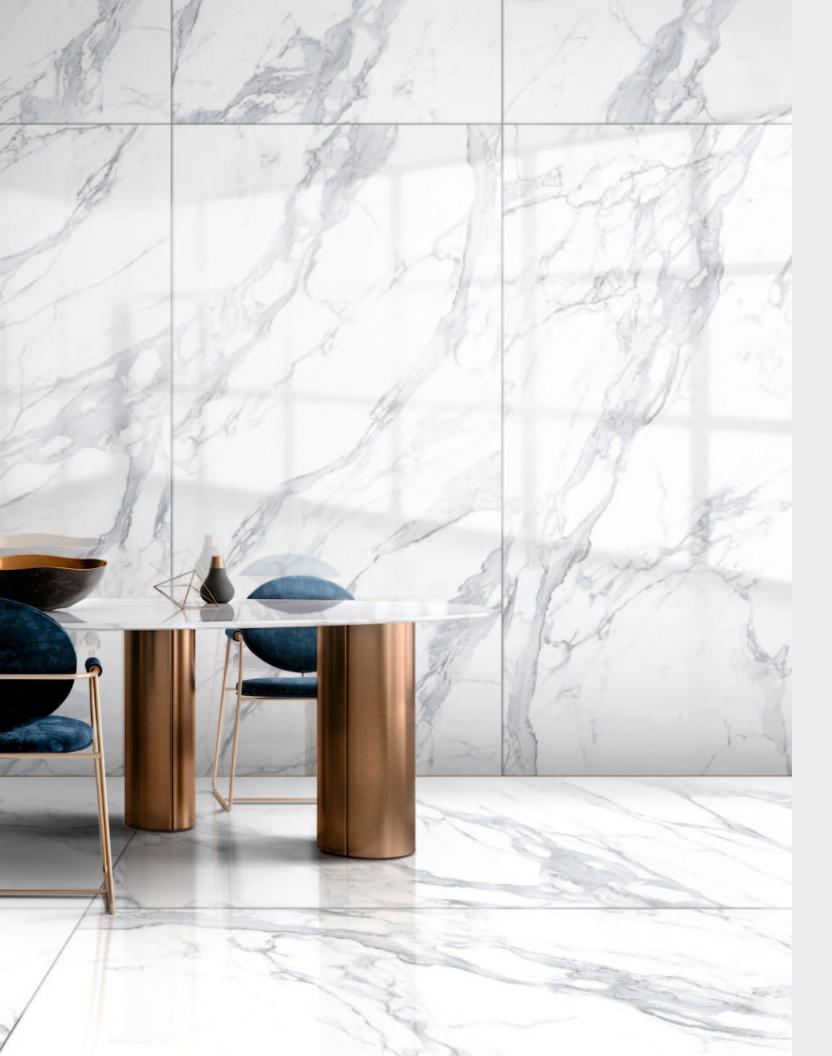

STATUARIO JORDAN

Statuario that give a classy and modern look to make any space elegant. The bright white shade with medium Grey veins gives out a delicate appeal, refining any surface.

Suitable **Applications**






















FLOOR



FINISH: NATURAL

AVAILABLE SIZES:

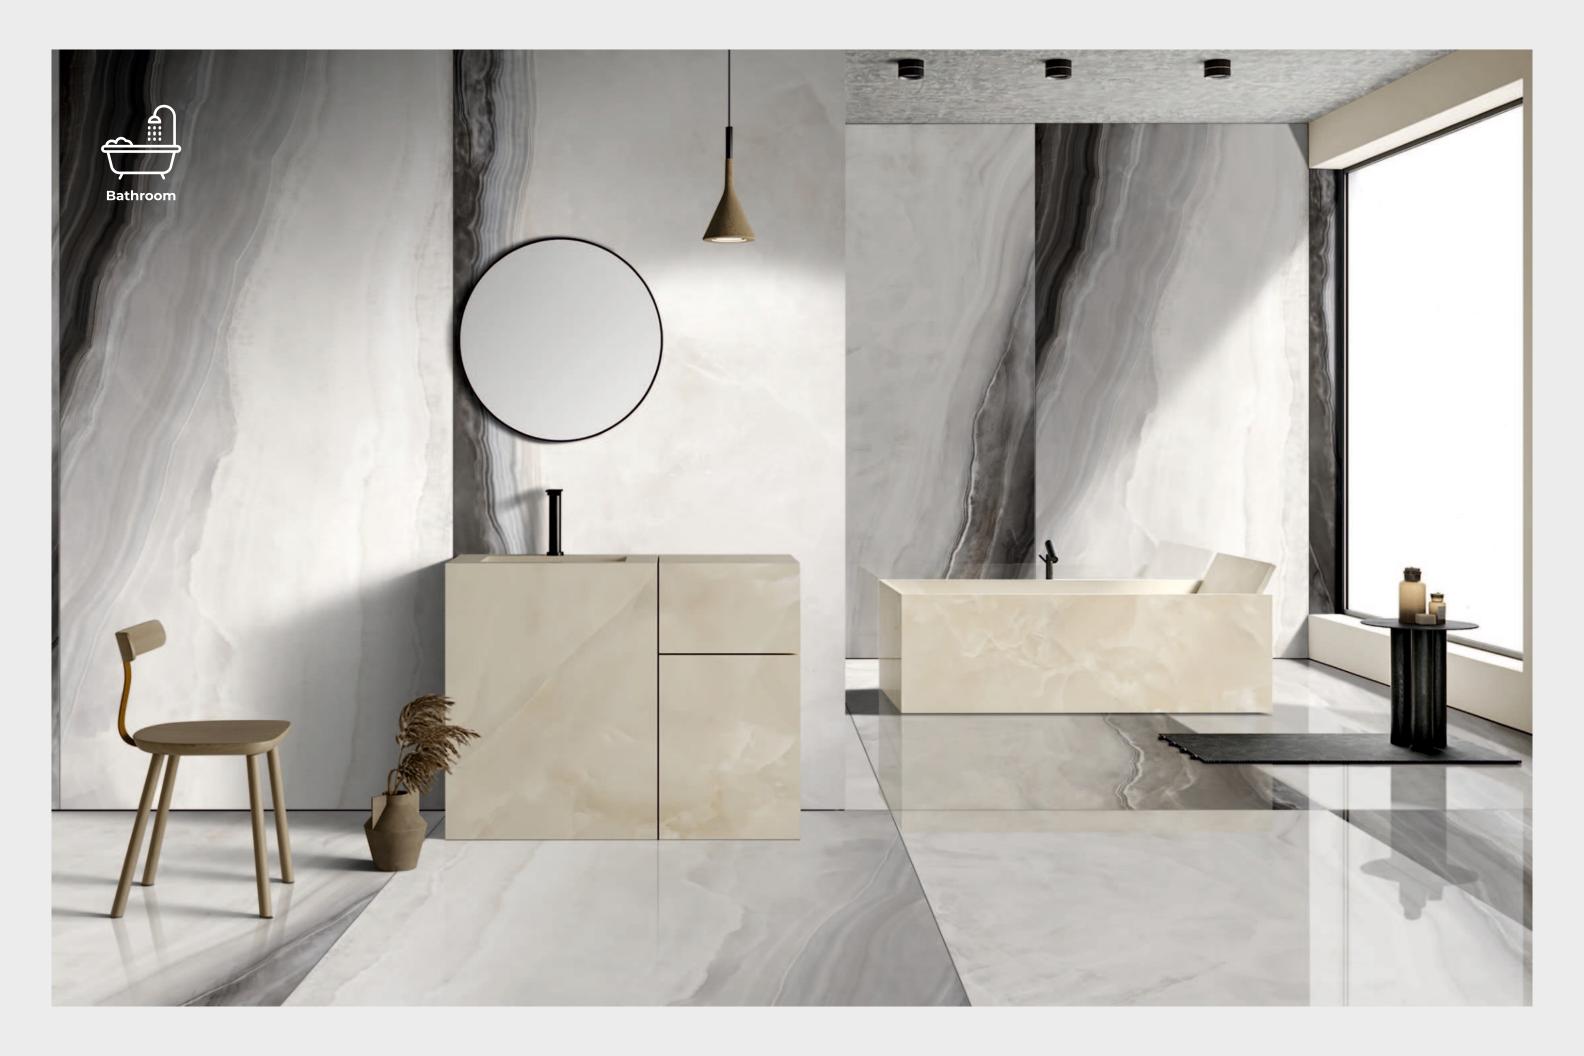



AGATA ONYX

Attractive shades and delicate veins make it fabulous. Tiles that compliment your design for refined

Suitable **Applications**





















ACCESSORIES


FLOOR



FINISH: NATURAL

AVAILABLE SIZES:



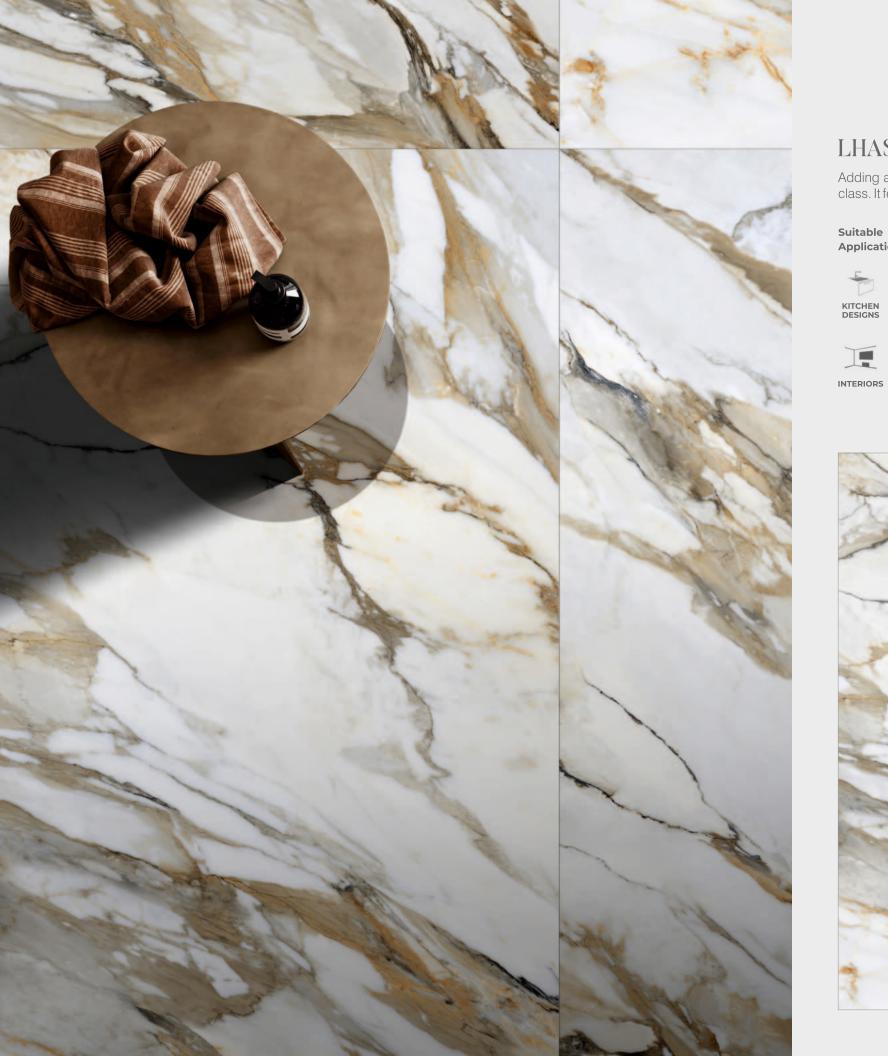

LHASA GOLD

Adding a small touch of gold instantly changes the home into a more grand space and gives it more class. It feels modern, classy, and simple.

Suitable **Applications**





II m

FACADES



















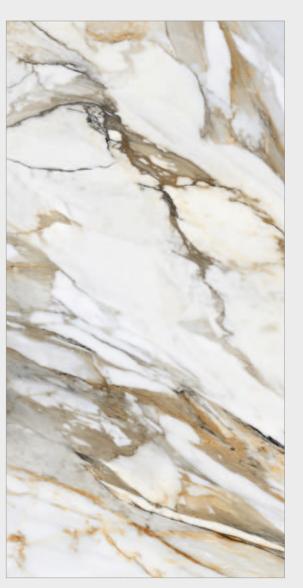

FINISH: NATURAL

AVAILABLE SIZES:

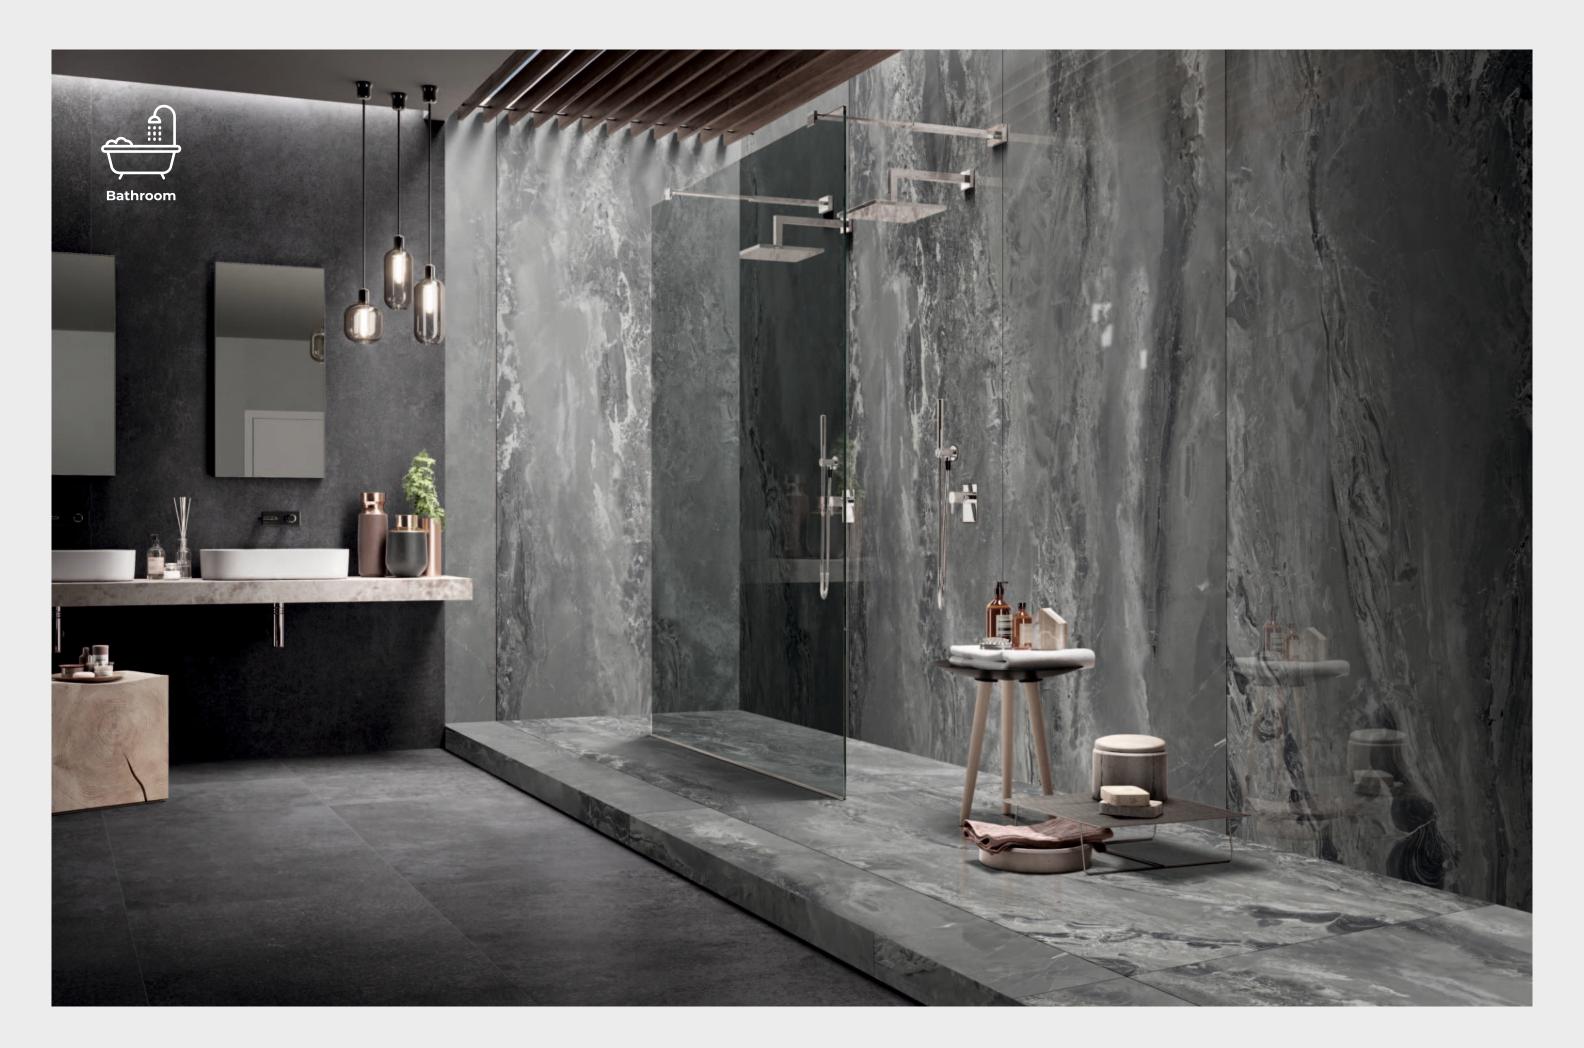



DAMASCUS GREY

Featuring an authentic brushed stone effect, neutral tones and a light airy feel to space. Add rawness and poised charm!

Suitable **Applications**



INTERIORS



11 mm

FACADES















ACCESSORIES






FLOOR



FINISH: NATURAL

AVAILABLE SIZES:



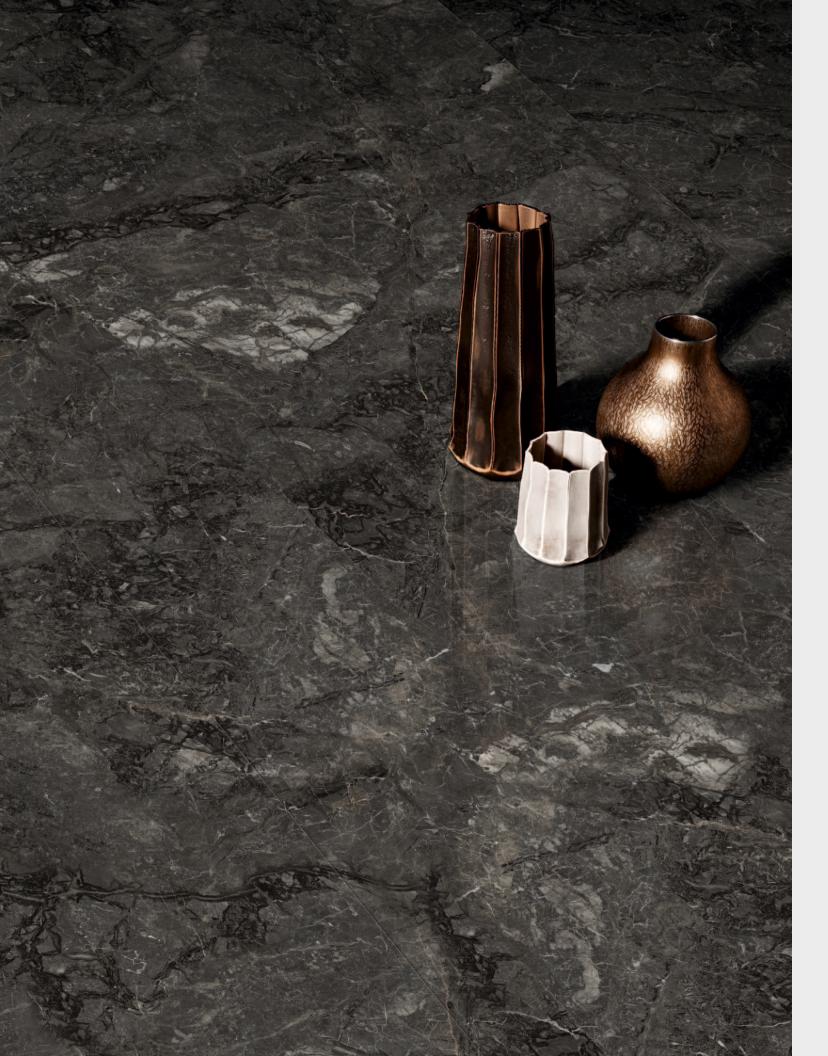

ROLEX GREY

Grey shades tiles are perhaps the most versatile, they make an impact by themselves without stealing the show. They carry their own charm.

Suitable **Applications**





















FURNITURE




FLOOR



FINISH: NATURAL

AVAILABLE SIZES:



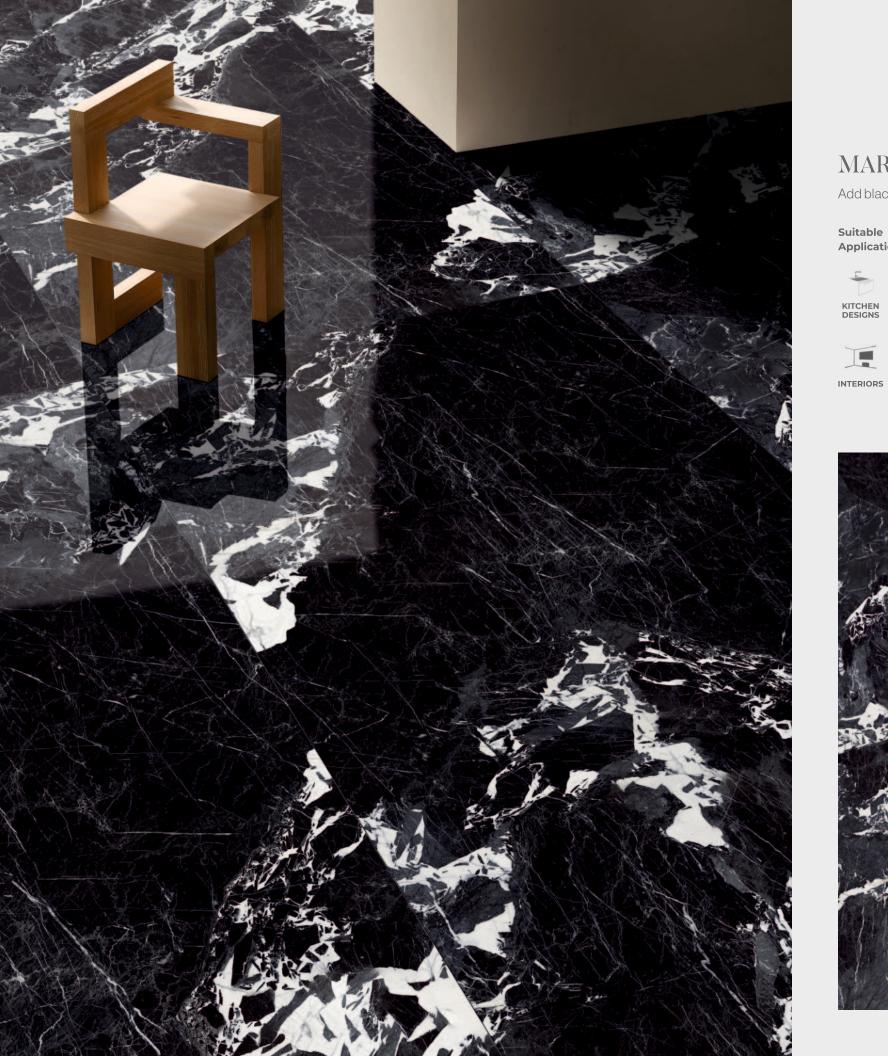

MARMO NERO

 $\label{prop:prop:continuous} Add \, black \, for \, a \, Luxurious, \, bold, \, and \, poised \, look. \, They \, shine \, out \, and \, bring \, out \, the \, best \, of \, any \, space.$

Suitable **Applications**
























FINISH: NATURAL

AVAILABLE SIZES:



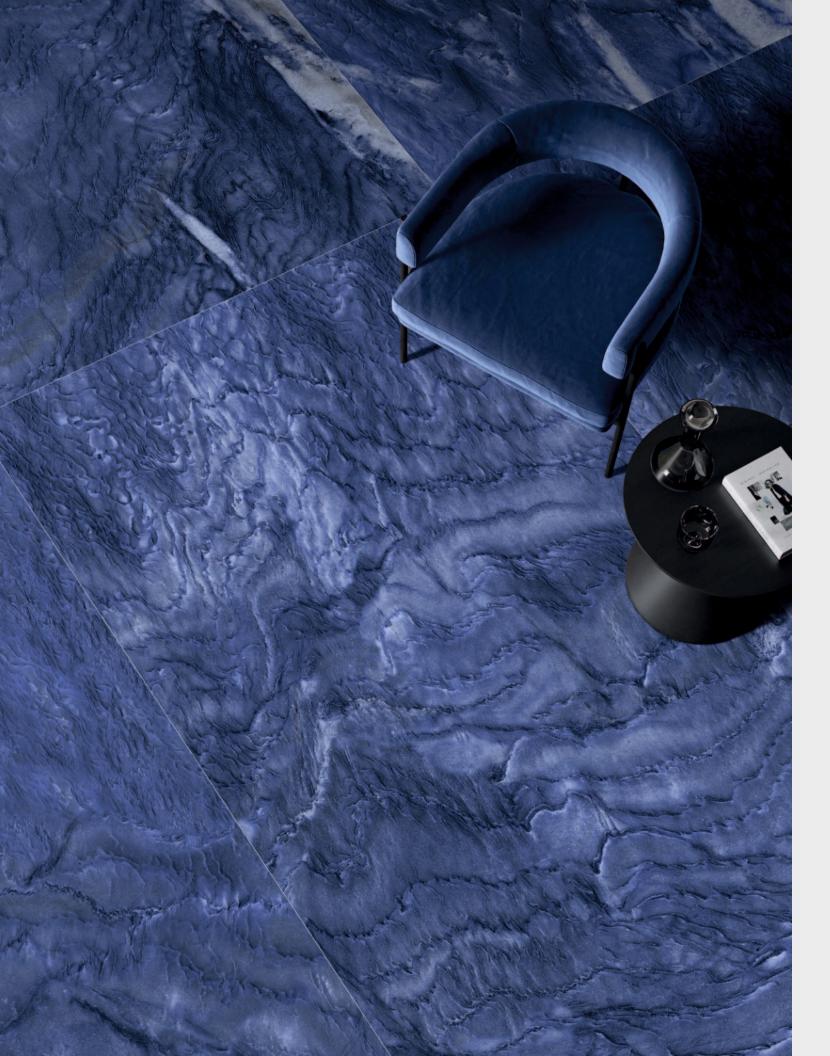

BLUE BAHIA

Bahia is a kind of blue that will uplift you. A natural blue stone which gives extreme natural effects with fresh feel.

Suitable **Applications**






















ACCESSORIES

FLOOR

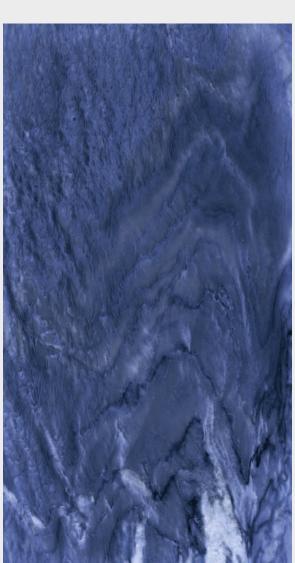

FINISH: NATURAL

AVAILABLE SIZES:

TECHNICAL SHEET

The Technical Details for each of the following slabs will remain the same as mentioned in the technical sheet:

1200 X 2800 X 9 X 6

1600 X 3200 X 12 | 20


SR.NO	PROPERTIES	STANDARDS AS PER ISO 13006 - 2018	OUR STANDARDS
01.	Deviation In Length & Width	± 0.30%	± 0.10%
02.	Deviation In Thickness	± 5.0%	± 5.0%
03.	Staightness In Side	± 0.30%	± 0.10%
04.	Rectangularity	± 0.30%	± 0.10%
05.	Surface Flatness Central Curvature	± 0.40%	± 0.10%
06.	Surface Flatness Edge Curvature	± 0.40%	± 0.10%
07.	Modulus Of Rupture (Kg/Cm²)	350+	450+
08.	Breaking Strength (N)	1300+	6000+
09.	Water Absorption	<0.5%	<0.07%
10.	Glossiness (Polish)	As Per Manufacturer	95+
11.	Glossiness (Matt)	As Per Manufacturer	8
12.	Crazing Resistance	4 Cycle	4 Cycle
13.	Stain Resistance	Min Class 3	Min Class 3

PACKAGING


A-frames & W ooden Vertical Pallet

To protect the integrity of the bigslabs during transport, optimized packaging has been specially designed and produced for the products.

The slabs are packed and shipped in specially made Wooden Vertical Pallet and on specific A-frames (specially designed to improve the carriage of these products in containers), taking care to protect every single slab from knocks and scratches as best as possible.

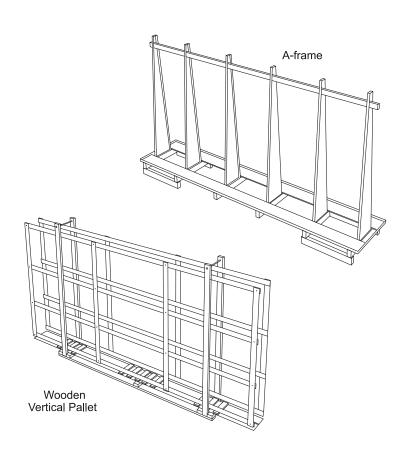


Handling the slabs on the construction site

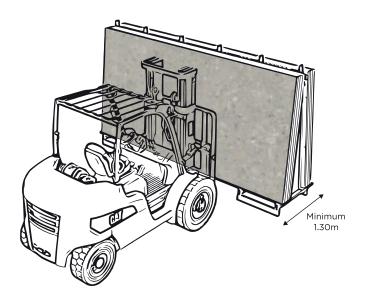

A-frame handling from long side (A) (Recommended Choice)


We recommend you to you use forks with a length of at least 1.30m, widening them to the maximum limit to make the most-possible use of the crate's surface.

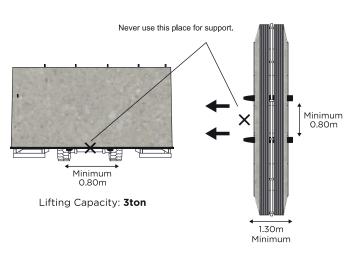


A-frame handling from short side (B)

We recommend you to use forks with a length of at least 2.80m, widening them to the maximum limit to make the most-possible use of the crate's surface.







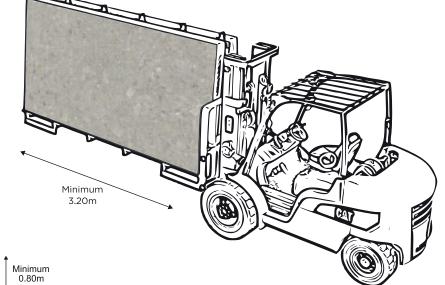

Handling with crane

Always pay attention to the movement and handling of the slabs to prevent splintering or breakage.


Make sure that oversized stone slabs or boards are delivered on a steel A-frame for support. Secure them with straps to prevent any horizontal movement during transport.

Panels can also be moved with a vertical clamp and overhead crane. To assist the movement of individual panels where the clamp doesn't close to 6mm, a rubber saddle can be made up (see photos) or vacuum suction lifters can be used.

When transporting to site, in particular benchtops with cut outs, always lay bench against a solid substrate such as MDF or similar. Ensure that backing support is at least 2cm wider than the benchtop, strap or tape, or both together, so handling will be easier and will avoid potential damage to panels in particular to cut outs. Always carry panels vertically not horizontally.



When handling the slabs, from removing them from the crates to fitting them on the wall or floor, we recommend you to use equipments designed specifically for handling large slabs.

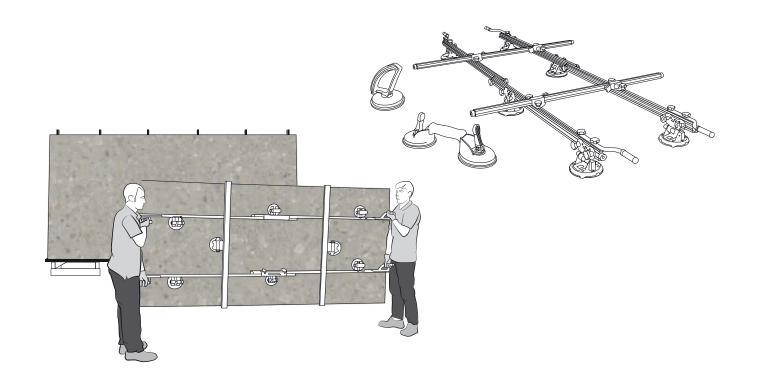

Handling with manual suction cups

In the case of two workers, perform the handling using manual suction cups (preferably equipped with a pressure adjustment function). The workers must remove the slabs by lifting them in the middle, then moving them in an upright position, positioning themselves at the two ends of the long side.


Manual handling

In addition to professional handling machinery, such as pneumatic handling machines or gantries, or the frame stated earlier, the slabs are usually moved (on the construction site and in the warehouse) by workers provided with tools that are commonly available and easy to use.

It is important to remember that manual handling must only be carried out where site conditions are amenable, such as:

- Ample room for manoeuvre;
- Ground-floor location;
- Easy access;
- Limited number of slabs to be laid.

IN ANY CASE, THE SLABS MUST ALWAYS BE HANDLED INDIVIDUALLY AND ENSURE THE WORKERS' COMPLETE SAFETY.

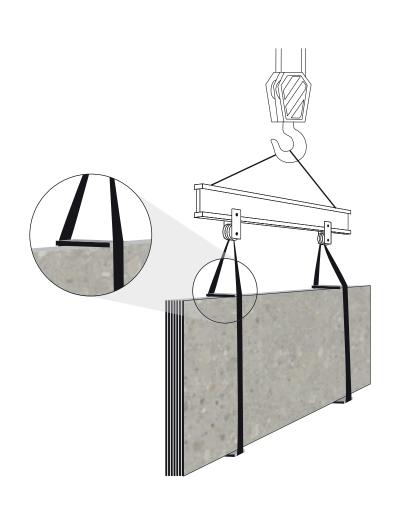

Note	

